

PowerWalker VI 2000RT LCD

Line-Interactive UPS



2000VA Line-Interactive UPS with 0.9 Output Power Factor

2-in-1 Rack/Tower Design with LCD display


8 IEC Outlets, Dry out contacts, EPO function, RJ11/RJ45

USB & RS-232 Connection for monitoring

Optional: SNMP module, AS/400 card, MBS, ATS,
Rack installation kit, Battery Pack



Item-No. 10120028

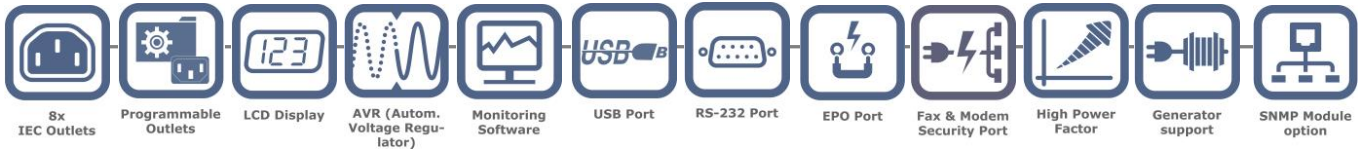


Product Features


PowerWalker VI 2000RT LCD is a Line-Interactive UPS with pure sine wave output and designed for fulfilling high quality power protection demand. It offers full protection for devices such as servers, network/telephone communication systems as well as for industrial applications.

With its slim design it only requires 2U valuable space of your rack system. The UPS can be installed in 19" rack systems or used as tower.


- Pure sine wave output with high output power factor 0.9
- Monitoring software included
- Output THDV < 3%
- High Frequency Topology
- Selectable Line Sensitivity
- Swappable LCD Direction
- Programmable power management outlet
- Emergency power off (EPO) function
- Intelligent fan control for reduced noise level
- Self-Monitoring and Fault Diagnosis
- Smart battery charger to extend battery life
- Optional: Rack installation kit, SNMP module, dry contact AS/400 card, Battery Pack, MBS, ATS



RJ11/RJ45 surge protection, RS232 incl. dry-out, intelligent slot, USB, EPO



8x IEC outlets (programmable)



Technical Details

Product Features

Capacity	2000VA/1800W
-----------------	--------------

Input

Voltage	220/230/240VAC
----------------	----------------

Acceptable Voltage Range	0-300VAC
---------------------------------	----------

Line Low Transfer (Wide Mode)	154/161/168VAC \pm 4%
--------------------------------------	-------------------------

Line Low Transfer	176/184/192VAC \pm 4%
--------------------------	-------------------------

Line Low Comeback	186/194/202VAC \pm 4%
--------------------------	-------------------------

Line High Transfer	264/276/288VAC \pm 4%
---------------------------	-------------------------

Line High Comeback	254/266/278VAC \pm 4%
---------------------------	-------------------------

Frequency Range	50/60Hz \pm 5Hz for normal mode; > 40Hz for generator mode
------------------------	---

Surge Rating (LV/HV)	430/250 Joules
-----------------------------	----------------

Output

Voltage	220/230/240VAC
----------------	----------------

Voltage Regulation	\pm 5% RMS for entire battery voltage range
---------------------------	--

Frequency	50 or 60Hz
------------------	------------

Frequency Regulation	\pm 0,1 Hz (Battery Mode)
-----------------------------	-----------------------------

Waveform	Pure Sine Wave
-----------------	----------------

Overload Rating

Line Mode	110-0%, \pm 10%; shutdown after 3min.
	150-0%, \pm 10%; shutdown after 200ms

Battery Mode	110% \pm 10%; shutdown after 30sec.
	120% \pm 10% ; shutdown after 100ms

Transfer Time

Typical	2-6ms Typical, 10ms max; 13ms max. for generator mode
----------------	--

Battery

Type	12V / 7Ah
-------------	-----------

Quantity	6
-----------------	---

Recharge Time	4h to 90% after discharged
----------------------	----------------------------

LCD Display (direction swappable)

LCD Indicators	UPS status, Load level, Battery level, Input/Output voltage, AC mode, battery mode, Bypass mode, fault conditions
-----------------------	---

Display colour	Blue, red, red flashing (depends on UPS status)
-----------------------	--

Audio Indicators

4 Modes	See manual for details
----------------	------------------------

Connections

Connection	USB, RS-232 incl. dry-out contacts
-------------------	------------------------------------

Outlets	8x IEC (programmable)
----------------	-----------------------

Intelligent Slot	Yes
-------------------------	-----

EPO	Yes
------------	-----

Surge Protection	RJ11/RJ45 (in/out)
-------------------------	--------------------

Software & System Requirements

Software	WinPower
-----------------	----------

Operating System	For details visit: http://www.powerwalker.com/winpower.html
-------------------------	---

Product Details

Dimensions	438 x 608 x 86.5 mm
-------------------	---------------------

Colour	Black
---------------	-------

Weight	28.06kg
---------------	---------

Fan Control	Always on, automatic speed control
--------------------	------------------------------------

Noise Level	< 45dB
--------------------	--------

Model Code	VI 2000RT LCD
-------------------	---------------

Environment

Temperature	0°C – 40°C
--------------------	------------

Humidity	20 - 80% (non-condensing)
-----------------	---------------------------

Package Content

Package Content	PowerWalker VI 2000RT LCD, Input Power Cord, 2x IEC cable, EPO plug, USB and RS-232 cable, Software CD, Tower holder, Rack ears, manual
------------------------	---

Optional Accessories

See next page

Logistic Data

Giftbox Language	EN
-------------------------	----

Manual Language	EN, DE, FR
------------------------	------------

Dimension/Giftbox	790 x 590 x 236 mm
--------------------------	--------------------

Weight/Giftbox	31.94kg
-----------------------	---------

Pieces/carton	1
----------------------	---

Pieces/palette	16
-----------------------	----

BlueWalker Item-No.	10120028
----------------------------	----------

EAN	4260074974324
------------	---------------

Warranty	24 Months (except battery)
-----------------	----------------------------

See UPS configurator on www.powerwalker.com for detailed backup time information.

Optional Accessories



NMC Card (SNMP module)
 Datasheet: [Link](#)
 Item No.: 10120517



EMD for NMC Card
 Environmental Monitoring Device
 Monitor Temperature & Humidity
 Datasheet: [Link](#)
 Item No.: 10120545




AS/400 Card
 Datasheet: [Link](#)
 Item No.: 10120527



19" Rack-Mount-Kit
 Datasheet: [Link](#)
 Item No.: 10120529



Battery Pack with inside 2x Battery Sets
 (Each battery set contain 6x 12V/7.2Ah batteries)
 Datasheet: [Link](#)
 Item No.: 10120537
 Possible to connect up to 9 Battery Packs



Battery Set with 6x 12V/7Ah batteries
 (Plug-and-Play solution incl. case and cabling
 to change internal bat. Set of VI 2000RT LCD)
 Datasheet: [Link](#)
 Item No.: to be checked



IEC -> Schuko Converter
 Item Nr.: 91015003



ATS (Automatic Transfer Switch)
 Datasheet: [Link](#)
 Item No.: 10120543



19" MBS
 Maintenance Bypass Switch
 Datasheet: [Link](#)
 Item No.: 10120501



MBS (Maintenance Bypass Switch)
 Datasheet: [Link](#)
 Item No.: 10120500



3x Yuasa 12V/9Ah battery
 Datasheet: [Link](#)
 CSB or Panasonic brand can also
 be used



3x Yuasa 12V/7Ah battery
 Datasheet: [Link](#)
 CSB or Panasonic brand can also
 be used

RS-232 cable
 Item Nr.: 91010012



USB cable
 Item Nr.: 91010011

Version: EN 26/08/2014

We reserve the right for technical changes and mistakes



Schuko Input -> IEC C13
Item Nr.: 91010017



UK Input -> IEC C13
Item Nr.: 91010029

Swiss Input -> IEC C13



IEC C13 -> IEC C14
Item Nr.: 91010013



Schuko Input -> IEC C19
Item Nr.: 91010018

UK Input -> IEC C19
Item Nr.: 91010030

Swiss Input -> IEC C19



IEC C19 -> IEC C20
Item Nr.: 91010028



IEC C13 -> IEC C20
Item Nr.: 91010041



IEC C14 -> IEC C19
Item Nr.: 91010040



IEC C14 -> Schuko
Converter
Item Nr.: 91015003



Schuko -> UK adaptor
Item Nr.: 91010031