

PowerWalker VFI 10000TP 3/1

Online UPS



10000VA Online UPS with 0.9 Output Power Factor

3 phase in / 1 phase out
(also configurable as 1 phase in / 1 phase out)

Terminal Outlet , EPO, 2x Intelligent Slot, Parallel Port

USB & RS-232 Connection for monitoring

Optional: SNMP module, AS/400 card, Modbus card,
Battery Pack,




Item-No. 10120162




Product Features

With its true double-conversion online UPS design, PowerWalker VFI 10000TP 3/1 provides powerful and overall protection to your sensitive devices. With its 3 phase in and 1 phase out it can balance the power consumption from all incoming lines and creates a stable power output for equipment with even high power consumption. Multiple communication ports allows to integrate the UPS in existing structures. Extended back-up time by optional additional battery packs.

- True double-conversion with pure sine wave output
- Output power factor 0.9
- Monitoring software included
- Wide input voltage range (110-276 VAC 1Φ in/ 190-478VAC 3Φ in)
- Input power factor correction
- Input THDi <5%, Output THDv <2%
- 50/60 Hz frequency converter mode
- ECO mode operation for energy saving
- Emergency power off (EPO) function
- Intelligent fan control for reduced noise level
- N+X Parallel Redundancy for up to 4 UPS of same size
- Integrated maintenance bypass switch
- Optional: SNMP module, Dry Contact AS/400 card, Modbus card, External Battery Pack, Additional Internal Charger Board;

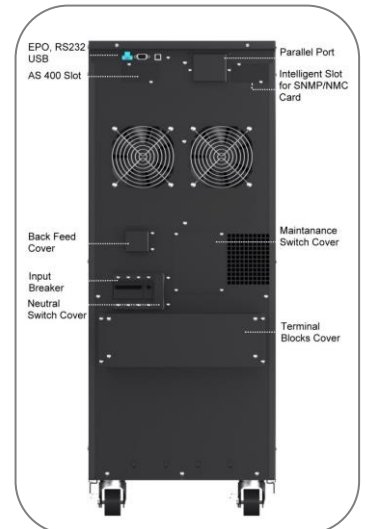

LCD Display

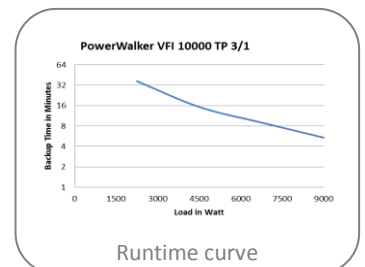

Runtime curve

Technical Details

Product Features

Capacity	10000VA/9000W
-----------------	---------------

Input

Voltage	230V / 400V
----------------	-------------

Voltage Range single phase	110-276VAC single phase with ground (L-N-G)
-----------------------------------	--

Transfer Voltage Range	Based on Load percentage 100%/50%
-------------------------------	--------------------------------------

Line low loss	176VAC/110VAC (±3%)
---------------	---------------------

Line low comeback	186VAC/120VAC (±3%)
-------------------	---------------------

Line high loss	276VAC (±3%)
----------------	--------------

Line high comeback	266VAC (±3%)
--------------------	--------------

Voltage Range three phase	190-478VAC three phase with ground (R-S-T-N-G)
----------------------------------	---

Transfer Voltage Range	Based on Load percentage 100%/50%
-------------------------------	--------------------------------------

Line low loss	305VAC/190VAC (±3%)
---------------	---------------------

Line low comeback	322VAC/208VAC (±3%)
-------------------	---------------------

Line high loss	478VAC (±3%)
----------------	--------------

Line high comeback	461VAC (±3%)
--------------------	--------------

THDi	<5% with full load
-------------	--------------------

Frequency Range	45-55Hz/54-66Hz
------------------------	-----------------

Power Factor	≥ 0.99 at Full Load
---------------------	---------------------

Generator Set	1.8 x UPS Rating Power
----------------------	------------------------

Output

Voltage	208/220/230/240 ± 1%
----------------	----------------------

Frequency (Synchronized Range)	45-55Hz/54-66Hz
---------------------------------------	-----------------

Frequency (Battery Mode)	50/60Hz ± 0.05Hz
---------------------------------	------------------

Current Crest Ratio	3:1
----------------------------	-----

Harmonic Distortion	≤ 2% (Full Linear Load)
----------------------------	-------------------------

Waveform	Pure Sine Wave
-----------------	----------------

Overload Capability	3 min at 100-110%
	30 sec at 110-130%
	5 sec at 130-150%
	1 sec at >150%

Transfer Time

AC to DC	Zero
-----------------	------

Inverter to Bypass	Zero
---------------------------	------

Inverter to ECO	Zero
------------------------	------

ECO to Inverter	<10ms
------------------------	-------

Battery

Type	12V / 9Ah
-------------	-----------

Quantity	24x in one string
-----------------	-------------------

Backup Time (full load)	5.4 Minutes
--------------------------------	-------------

Recharge Time	3h to 90%
----------------------	-----------

Bypass

Before UPS Power-on	Default "No" Change to "Yes" via display panel
----------------------------	---

Overload und UPS Failure	Automatically transfer to bypass
---------------------------------	----------------------------------

By Setting	Voltage Rang: 176-276V ± 3%
-------------------	-----------------------------

By Setting	Voltage Rang: 176-276V ± 3%
-------------------	-----------------------------

LCD Display

LCD Indicators	UPS status, Load level, Battery level, Input/Output voltage, AC mode, Battery mode, Bypass mode, Fault conditions
-----------------------	---

Audio Indicators

4 Modes	See manual for details
----------------	------------------------

Connections

Communication	USB & RS232
----------------------	-------------

Outlets	Terminal outlet
----------------	-----------------

Intelligent Slot	Yes
-------------------------	-----

AS-400 Slot	Yes
--------------------	-----

EPO	Yes
------------	-----

Parallel Port	Yes, up to 4 UPS (included)
----------------------	-----------------------------

Maintenance Switch	Yes
---------------------------	-----

Software & System Requirements

Software	Winpower
-----------------	----------

Operating System	For details visit: http://www.powerwalker.com/winpower.html
-------------------------	---

Product Details

Dimensions	650 x 350 x 890 mm
-------------------	--------------------

Colour	Black
---------------	-------

Weight	127 kg
---------------	--------

Fan Control	Always on, automatic speed control
--------------------	------------------------------------

Noise Level	< 55dB at 1 Meter
--------------------	-------------------

Model Code	VFI 10000TP 3/1
-------------------	-----------------

Environment

Temperature	0°C – 45°C
--------------------	------------

Humidity	0 - 95% (non-condensing)
-----------------	--------------------------

Package Content

Package Content	PowerWalker VFI 10000TP 3/1, manual, USB cable, RS-232 cable, parallel cable, Software CD ;
------------------------	---

Logistic Data

Giftbox Language	EN
Manual Language	EN
Dimension/Pallet	815 x 475 x 1120 mm
Weight/Pallet	140 kg
Pieces/Carton	1
Pieces/Pallet	1
Item Number	10120162
EAN-Code	4260074975581
Warranty	24 Month (except battery)
IEC Norm	62040-2 Category C3, 62040-1-1,

Use UPS configurator on www.powerwalker.com for detailed backup time information.

Available accessories



NMC Card (SNMP module)
Datasheet: [Link](#)
Item No.: 10120517



EMD for NMC Card
Environmental Monitoring Device
Monitor Temperature & Humidity
Datasheet: [Link](#)
Item No.: 10120545



CMC Card (Modbus Card)
Datasheet: [Link](#)
Item No.: 10120564



AS/400 Card
Datasheet: [Link](#)
Item No.: 10120528



Yuasa 12V/7Ah battery
Datasheet: [Link](#)
CSB or Panasonic brand
can also be used



Yuasa 12V/9Ah battery
Datasheet: [Link](#)
CSB or Panasonic brand
can also be used



4A Charger
For: VFI 10000 TP 3/1
Item No.: 10120573



Battery Pack with
2x Battery Sets inside
(Each battery set contain
24x 12V/9Ah batteries)
Datasheet: [Link](#)
Item No.: 10120559

RS-232 cable
Item Nr.: 91010012



USB cable
Item Nr.: 91010011