


CODE: **AWO000** v.1.8/IV
NAME: **7/TRP20/DSPR**

EN

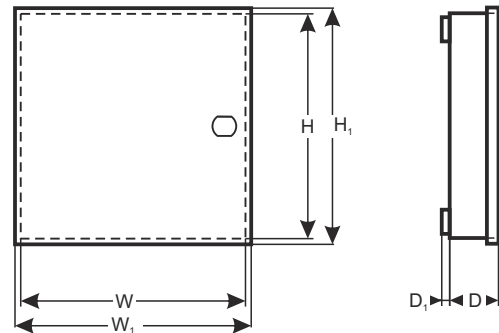

DESTINATION

DSC: PC 1404, 1616, 1832

MODULES: 2x (4108, 5108, 5208, 5100, 4116)
4204, 4216, 4580, 5400, 5204, 5580, 5200

PARADOX: 728ULT, E55, E65, SP4000, SP5500, SP6000

MODULES: ZX8, APR3- HUB2, ZX8SP, APR3-ADM2, PGM4

RISCO: PRO24

MODULES: E04, EZ8, EZ16

SATEL: CA4V1, CA5, CA6, VERSA5,10, INTEGRA24

MODULES: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS- OC, OPS-R, OPS- ROC, VGM- 16, SR)

PYRONIX: MATRIX 424, 6

CROW: RUNNER 4,8

SUMMIT: PENTA

ROEL: SIGMA6,12, CERBER

EBS: PX 202A

TECHNICAL DATA

External dimensions of the enclosure:	W=250, H=250, D+D1=80+8 [±2 mm]
External dimensions of the front panel:	W1=255, H1=255 [±2 mm]
Battery space:	7Ah/12 V Sealed Lead Acid (SLA)
Weight net/gross:	2,00 / 2,10 [kg]
Transformer:	TRP 20VA/16V/18V in the case of PC/ABC in class UL94-V0, IP30
Power supply:	230 V AC (-15%/+10%), 50 Hz, 120 mA (max.)
Power supply output:	U1=16 V AC or U2=18 V AC (-5%, +15%), I1=1,2 A or I2=1,0 A (max.)
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5 A@50 V DC max. NC - normally closed contacts
Closing:	sheet-metal screws x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal
Declaration, warranty:	CE, 2 year from the production date