


CODE: **AWO009** v.1.2/IV  
 NAME: **7/TRP40/DSPR/S**

EN

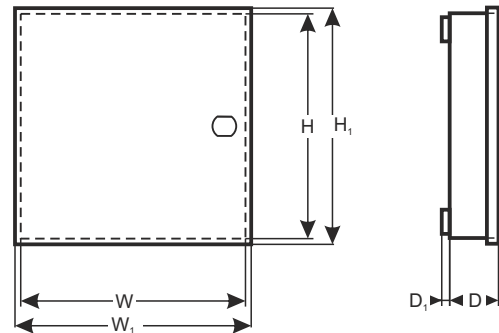

## DESTINATION

**DSC:** PC 1616, 1832, 1864

**MODULES:** 2x (4108, 5108, 5208, 5100, 4116)  
 4204, 4216, 4580, 5400, 5204, 5580, 5200

**PARADOX:** 728ULT, E55, E65, SP4000, SP5500, SP6000, SP7000, EVO48, EVO192

**MODULES:** ZX8, APR3- HUB2, ZX8SP, APR3-ADM2, PGM4

**RISCO:** PRO24

**MODULES:** E04, EZ8, EZ16

**SATEL:** CA4V1, CA5, CA6, CA10, VERSA5, 10, 15, INTEGRA24, 32

**MODULES:** CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS-R, OPS-ROC, VGM- 16, SR, PTSA)

**PYRONIX:** MATRIX 424, 6

**CROW:** RUNNER 4,8

**TELMOR:** TCA- 824

**SUMMIT:** PENTA

**ROEL:** SIGMA6,12, CERBER

**EBS:** PX 202A

## TECHNICAL DATA

<b>External dimensions of the enclosure:</b>	W=250, H=250, D+D1=80+8 [±2 mm]
<b>External dimensions of the front panel:</b>	W1=255, H1=255 [±2 mm]
<b>Battery space:</b>	7Ah/12 V Sealed Lead Acid (SLA)
<b>Weight net/gross:</b>	2,40 / 2,55 [kg]
<b>Transformer:</b>	TRP 40VA/16 V/18 V in the case of PC/ABC in class UL94-V0, IP30
<b>Power supply:</b>	230 V (-15%/+10%), 50 Hz, 200mA (max.)
<b>Power supply output:</b>	U1=16 V AC or U2=18 V AC (-5%, +15%), I1=2,2 A or I2=2,0 A (max.)
<b>Operating environment:</b>	class II, -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	1 x microswitch: opening, 0,5 A@50 V DC max. NC - normally closed contacts
<b>Closing:</b>	sheet-metal screws x 4
<b>Notes:</b>	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal
<b>Declaration, warranty:</b>	CE, 2 year from the production date