


CODE: **AWO040** v.1.4/V
 NAME: **7/TRP20/GSM enclosure**

EN

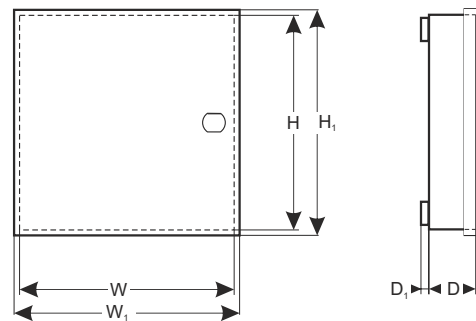

DESTINATION

AWO040 metal enclosure are designed as component (supplying) in intrusion alarm systems, access control systems, security systems etc.

It is intended for installation:

- GSM/GPRS transmitter
 - PX100A
 - PX200A
 - LX10
 - SR-806ZJ

DANE TECHNICZNE

External dimensions of enclosure:	W=250, H=250, D+D _i =80+8 [+/-2 mm]
External dimensions of front panel:	W _i =255, H _i =255 [+/-2 mm]
Battery space:	7Ah/12V Sealed Lead Acid (SLA)
Net/gross weight:	1,95 / 2,10 [kg]
Transformer:	TRP 20VA/14V/18V in the case of PC/ABC in class UL94-V0, IP30
Power supply:	230 V AC (-15%/+10%), 50Hz, 120mA (max.)
Power supply output:	U1=14 V AC or U2=18 V AC (-5%, +15%), I1=1,4A or I2=1,0A (max.)
Operating environment:	Temperature: -10°C + +40°C relative humidity 20%...90%, without condensation
Destination:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	inside
Tamper switch protection:	1 x microswitch: enclosure opening 0,5 A; 50 V DC max. NC – normally closed contacts Optionally: 1 x microswitch: detachment form wall, 0,5A; 50 V DC (required PKAZ066)
Closing:	screwed: screw x 4
Notes:	optional: lockable (MR008 or MR027), distance from wall (mounting source) – 8mm
Declaration, warranty:	CE, 2 years from production date