


CODE: **AWO213** v1.9/IV
 NAME: **17/TRZ40/SATEL/GRADE3**

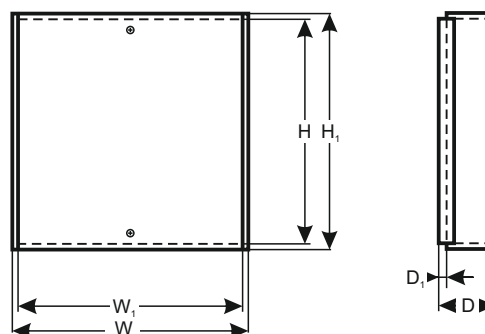

DESTINATION

7Ah:

- 1) CA4V1, 5, 6, 10, VERSA 5, 10, 15, INTEGRA 24, 32 + 3 x CA10E (CA64E, SM, MST1)
- 2) CA4V1, 5,6,10, VERSA 5,10,15, INTEGRA 24, 32 + CA10E (CA64E, SM, MST1) + GSMLT1
- 3) CA4V1,5,6,10, VERSA 5,10,15, INTEGRA 24, 32 + CA10E (CA64E, SM, MST1) + CA64 (EPS, ADR, O-R, O-ROC, O-OC, VGM- 16, SR, ACC- KP-PS)

Modules:

- 1) CA64 (PP, EPS, ADR, O- R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR, PTSA, ACC-KP-PS) + 3 x CA10E (CA64E, SM, MST1)

17 Ah:

- 1) CA4V1, 5,6, 10, VERSA 5,10,15, INTEGRA 24, 32 + 2 x CA10E (CA64E, SM, MST1)
- 2) CA4V1, 5,6,10, VERSA 5,10,15, INTEGRA 24, 32 + GSMLT1
- 3) CA4V1, 5,6,10, VERSA 5,10,15, INTEGRA 24, 32 + CA64 (EPS, ADR, O- R, O-ROC, O-OC, VGM-16, SR, ACC- KP- PS)

Modules:

- 1) CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM-16, SR, PTSA, ACC- KP-PS) + 2x CA10E (CA64E, SM, MST1)

TECHNICAL DATA

External dimensions of the enclosure:	W=330, H=305, D=110, D ₁ =15 [+/- 2mm]
External dimensions of the front panel:	W ₁ =325, H ₁ =310 [+/- 2mm]
Weight net/gross:	4.2kg / 4.5kg [+/-0.1]kg
Battery space:	17 Ah/12 V Sealed Lead Acid (SLA)
Transformer:	TRZ 40 VA/16 V/18 V in the case of PC/ABC in class UL94-V0, IP43
Power supply:	230 V (-15%/+10%), 50Hz, 200mA (max.)
Power supply output:	U1=16 V AC or U2=18 V AC (-5%, +15%), I1=2,2 A or I2=2,0 A (max.)
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 1.0mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	enclosure is equipped with set including mounting bracket with tamper
Closing:	screwed x 2. (screwed for front casing)
Notes:	distance from wall (mounting surface) - 15mm, easy door removal, hole for pigtail
Declaration, warranty:	CE, CLC/TS 50131-3:2003, 2 year from the production date