


CODE: **AWO214** v.2.0/V  
 NAME: **17/TRP40/PAR**



EN

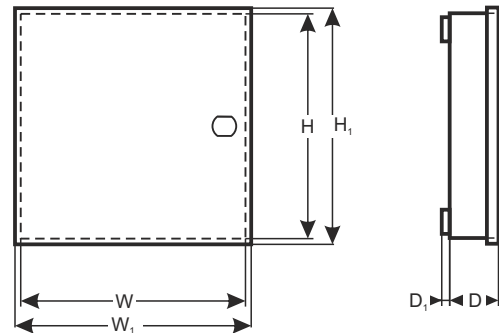

## DESTINATION

**PARADOX**  
 CONTROL PANELS:

**7Ah:**

- 1) (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, HD, MG5000, 5050, PS17, ACM12, APR3-ADM2, RPT1, LSN4) + 6x Zx8 (ZX4, APR3- ADM2, APR3- HUB2, PGM4)

**17Ah:**

- 1) (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, HD, MG5000, 5050, PS17, ACM12, APR3-ADM2, RPT1, LSN4) + 4x Zx8 (APR3- ADM2, HUB2, PGM4, 6x ZX4)

## TECHNICAL DATA

<b>External dimensions of the enclosure:</b>	W=320, H=400, D+D1=90+8 [±2 mm]
<b>External dimensions of the front panel:</b>	W1=325, H1=405 [±2 mm]
<b>Battery space:</b>	17Ah/12 V Sealed Lead Acid (SLA)
<b>Weight net/gross:</b>	3,552 / 3,757 [kg]
<b>Transformer:</b>	TRP 40/16/18 in the case of PC/ABC in class UL94-V0, IP30
<b>Power supply:</b>	230 V (-15%/+10%), 50Hz, 200mA (max.)
<b>Power supply output:</b>	U1=16 V AC or U2=18 V AC (-5%, +15%), I1=2,2 A or I2=2,0 A (max.)
<b>Operating environment:</b>	class II, -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	1 x microswitch: opening of enclosure and detachment from mounting surface, 0,5 A@50 V DC max. NC - normally closed contacts
<b>Closing:</b>	sheet-metal screws x 4
<b>Notes:</b>	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal, holes for MAGELLAN (antennas)
<b>Declaration, warranty:</b>	CE, 2 years from production date