


CODE: AWO220PU v2.0/VI
NAME: 17/40/DSPR/S/PUSTA

EN

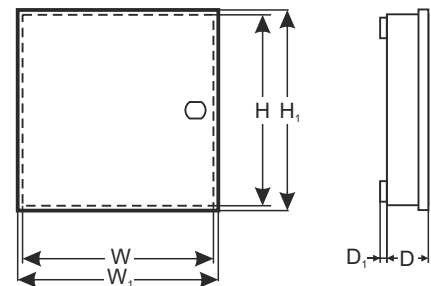

DESTINATION

DSC:

Power Series Neo

Alarm control panels: HS2016, HS2016-4, HS2032, HS2064, HS2128.

Modules: HSM2300, HSM2204, HSM2208, HSM2108, PCL-422.

Power Series

Alarm control panels: PC1832, PC1864.

Modules: PC5320, PC5100, PC5108, PC4216, PC5200, PC5204, PC5400, IT-100.

Power Series Pro

Alarm control panels: HS3032, HS3128, HS3248.

Modules: HSM3408, HSM2108, HSM3204CX, HSM3350, AMX-400.

Communication modules and transmitters: LE2080(R)/3G2080(R), TL280LE(R)/TL2803G, 3G2060(R)/TL2603G(R), LE2080(R)/TL280LE(R)/E.

EBS:

Alarm control panels: PX 202A.

PARADOX:

Alarm control panels: SP65, SP4000, SP5500, SP6000, SP7000, EVO192.

Modules: ZX4, ZX8, ZX8SP, PGM4, HUB2.

PYRONIX:

Alarm control panels: MATRIX 424, MATRIX6, MATRIX816, MATRIX832, MATRIX832+

RISCO:

Alarm control panels: RP512MS ProSYS Plus (tylko w obudowie pustej, zasilanie DC14,4V).

ROGER:

Alarm control panels: PR402, CPR 32- SE.

SATEL:

Alarm control panels: Integra24, 32, 64, 64+, 128, 128+, 256+, Versa5, 10, 15, Plus, IP, Perfecta16, 32, 32 LTE -T 32, Micra, CA-10 P, CA-6 P, CA-5 P, CA-4 VP.

Modules: CA-64 PTSA, CA-10 E, ETHM-1 Plus, ETHM-2, GSM-X, GSM-X LTE, INT-ADR, INT-AV, INT-E, INT-FI, INT-GSM, INT-KNX-2, INT-O, INT-PP, INT-R, INT-RS Plus, INT-VG, INT-VMG, MST-1, ACCO-NT, ACCO-KP-PS, ACCO-KPWG-PS.

TELMOR:

Alarm control panels: TCA-824.

Modules: TEX800.

TEXCOCOM:

Alarm control panels: Premier48, 88, 168, 412, 640, , 816, 832.

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.

TECHNICAL DATA

External dimensions of enclosure: W=320, H=304, D+D₁=91+8 [+/-2 mm]

External dimensions of front panel: W₁=326, H₁=308 [+/-2 mm]

Fitting battery: 7Ah, 17Ah/12 V Sealed Lead Acid (SLA)

Weight net/gross: 1,978 / 2,248 [kg]

Transformer: without transformer - can be mounted in casing: TRP20, TRP40, TRZ40

Operating conditions: Temperature: -10°C + +40°C, relative humidity 20%...90%, without condensation

Material: sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Tamper protection: 1 x microswitch: enclosure opening 0,5 A; 50 V DC max. NC - normally closed contacts

Optionally: 1 x microswitch: detachment form wall, 0,5 A; 50 V DC (required PKAZ066)

Closing: screwed: screw x 4

Notes: optional: lockable (MR008 or MR027), distance from wall (mounting surface) - 8mm

Declaration, warranty: CE, 2 years from production date