


CODE: **AWO224** v1.2/IV
 NAME: **Enclosure 17/EXP/SAT**

EN

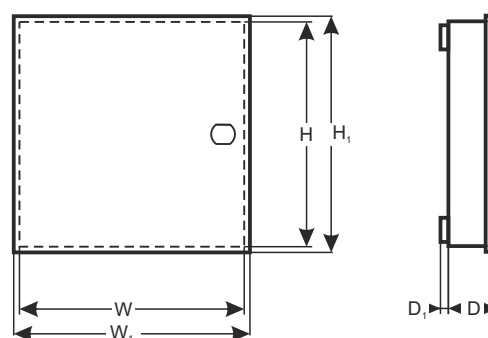

DESTINATION

SATEL:

Alarm control panels: Versa10, Perfecta16, 32.

Modules: ETHM-1 Plus, GM-X, GSM-X LTE, INT-ADR, INT-AV, INT-E, INT-FI, INT-GSM, INT-KNX-2, INT-O, INT-PP, INT-R, INT-RS Plus, INT-VG, INT-VMG, ACCO-NT, ACCO-KP, ACCO-KPWG, ACCO-KP-PS, ACCO-KPWG-PS.

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement

TECHNICAL DATA

External dimensions of enclosure:	W=320, H=304, D+D ₁ =101+8 [+/- 2mm]
External dimensions of front panel:	W ₁ =326, H ₁ =308 [+/- 2mm]
Net/gross weight:	2,500 / 2,750 [kg]
Space for battery:	17Ah/12V Sealed Lead Acid (SLA / AGM)
Operating conditions:	II environmental class, -10°C+ 40°C
Material:	sheet steel DC01, thickness: 0,7mm / 1,0mm, anticorrosion protection, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5 A@50 V DC max. NC/NO - normally closed contacts / normally open
Closing:	screwed: screw x 4
Notes:	possibility of installing lock, distance from wall (mounting surface) - 8mm, possibility of mounting tamper switch PKAZ066 detects detachment from wall, enclosure is equipped with TH35 rail allowing mounting power supplies or other devices in this standard.
Declaration, warranty:	RoHS, 2 years from production date