


CODE: **AWO300 v2.1/V**
 NAME: **17/TRZ80/DSPR**

EN

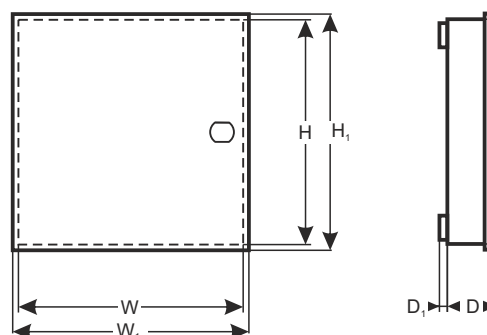

DESTINATION

DSC:

Power Series Neo

Alarm control panels: HS2016, HS2016-4, HS2032, HS2064, HS2128.
 Modules: HSM2300, HSM2204, HSM2208, HSM2108, PCL-422.

Power Series

Alarm control panels: PC1832, PC1864.

Modules: PC5320, PC5100, PC5108, PC4216, PC5200, PC5204, PC5400, IT-100.

Power Series Pro

Alarm control panels: HS3032, HS3128, HS3248. Modules: HSM3408, HSM2108, HSM3204CX, HSM3350, AMX-400.

Communication modules and transmitters: LE2080(R)/3G2080(R), TL280LE(R)/TL2803G, 3G2060(R) / TL2603G(R), LE2080(R)E/TL280LE(R)E.

EBS:

Alarm control panels: PX 202A.

PARADOX:

Alarm control panels: SP65, SP4000, SP5500, SP6000, SP7000, EVO192.

Modules: ZX4, ZX8, ZX8SP, PGM4, HUB2.

PYRONIX:

Alarm control panels: MATRIX 424, MATRIX6, MATRIX816, MATRIX832, MATRIX832+

RISCO:

Alarm control panels: RP224M - PRO24, ProSYS PRO116/PRO128/PRO140.

Modules: RP512EZ16 ProSYS Plus, RP432EZ8 LightSYS ProSYS Plus, RP296EPS ProSYS, RP128EPS LightSYS.

ROGER:

Alarm control panels: PR402, CPR 32- SE.

SATEL:

Alarm control panels: Integra24, 32, 64, 64+, 128, 128+, 256+, Versa5, 10, 15, Plus, IP, Perfecta16, 32, 32 LTE -T 32, Micra, CA-10 P, CA-6 P, CA-5 P, CA-4 VP.

Modules: CA-64 PTSA, CA-10 E, ETHM-1 Plus, ETHM-2, GSM-X, GSM-X LTE, INT-ADR, INT-AV, INT-E, INT-FI, INT-GSM, INT-KNX-2, INT-O, INT-PP, INT-R, INT-RS Plus, INT-VG, INT-VMG, MST-1, ACCO-KP-PS, ACCO-KPWG-PS.

TELMOR:

Alarm control panels: TCA-824.

Modules: TEX800, TMT-1.

TEXECOM:

Alarm control panels: PREMIER48, 88, 412, 640, 816, 832.

Modules: COM300.

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.

Documentation does not take into account the transformer power required for the correct operation of installed devices. It should be verified with the manufacturer's data of the devices.

TECHNICAL DATA

External dimensions of enclosure:	W=320, H=398, D+D ₁ =121+8 [+/-2 mm]
External dimensions of front panel:	W ₁ =326, H ₁ =403 [+/-2 mm]
Battery space:	17Ah/12 V Sealed Lead Acid (SLA)
Weight net/gross:	4,20 / 4,45 [kg]
Transformer:	TRP 80VA/16V/18V/20V in case of PC/ABC in class UL94-V0, IP30
Power supply:	230 V AC (-15%/+10%), 50Hz, 400mA (max.)
Power supply output:	U1=16 V AC or U2=18 V AC or U3=20 V AC (-5%,+15%), I1=5,0 A or I2=4,5 A or I3=4,0 A (max.)
Operating environment:	Temperature: -10°C + +40°C relative humidity 20%...90%, without condensation
Material description:	sheet steel DC01, thickness: 0,7mm, anticorrosion protection, color: RAL 9003
Destination:	inside
Tamper protection:	1 x microswitch: enclosure opening 0,5 A; 50 V DC max. NC – normally closed contacts Optionally: 1 x microswitch: detachment form wall, 0,5A; 50 V DC (required PKAZ066)
Closing:	screwed: screw x 4
Notes:	optional: lockable (MR008 or MR027), distance from wall (mounting surface) - 8mm
Declaration, warranty:	CE, 2 years from production date