


CODE: **AWO306** v1.2/VI
 NAME: **28/TRP80/SATEL/GRADE 3**

EN

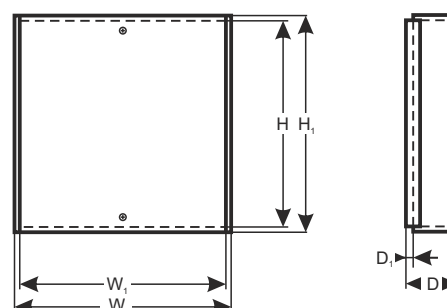

DESTINATION

SATEL:

Arm control panels:

Integra24, Integra32, Integra64, Integra64+, Integra128, Integra128+, Integra256+, Versa Plus, Versa IP

Modules:

INT-E, INT-ADR, INT-GSM, INT-KNX-2, INT-FI, INT-VG, INT-AV, INT-RS Plus (max. 15 pcs.),

INT-PP, INT-O, INT-R, INT-VMG, ETHM-1 Plus (max. 5 pcs.),

ACCO-KP, ACCO-KPWG (max. 1 pcs.)

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.

TECHNICAL DATA

External dimensions of enclosure:	W=460, H=550, D=175, D ₁ =20 [+/- 2mm]
External dimensions of front panel:	W ₁ =455, H ₁ =555 [+/- 2mm]
Fitting battery:	28 Ah/12 V
Weight net/gross:	9,33 / 9,65 [kg]
Transformer:	TRP 80/16V/18V/20 in case of PC/ABC in class UL94- V0, IP30
Power supply:	230 V AC (-15%/+10%), 50 Hz, 200 mA (max.)
Output current TAMPER - max:	500mA@50 V DC
Operating conditions:	II environmental class, -10°C+ 40°C
Material:	sheet steel DC01, thickness: 1,0mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	enclosure is equipped with set including mounting bracket with tamper
Closing:	screwed
Notes:	distance from wall (mounting surface) - 20mm, easy door removal, hole for pigtail
Declaration, warranty:	CE, CLC/TS 50131-3:2003, 2 years from production date