
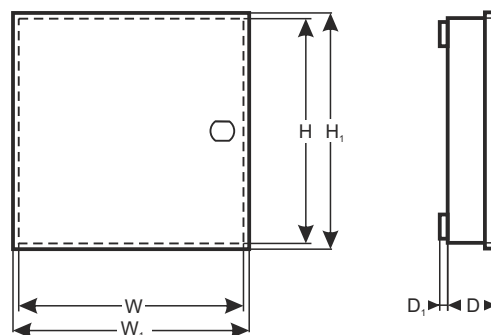


CODE: **AWO317 v1.1/IV**
 NAME: **17/LRS75/PS/LS enclosure**

EN

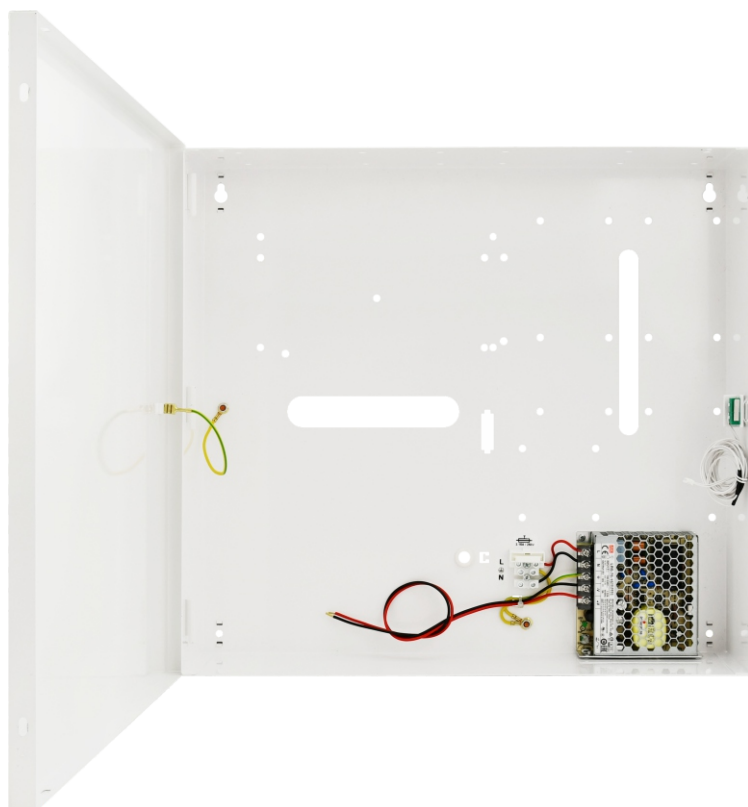

DESTINATION

RISCO:

Alarm control panels: RP432M LightSYS, RP432MN LightSYS 2, RP432MP LightSYS Plus, RP512MA ProSYS Plus.
 Modules: RP432EZ8 LightSYS / ProSYS Plus, RP512EZ16 ProSYS Plus.

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.

TECHNICAL DATA

External dimensions of enclosure:	W=430, H=398, D+D ₁ =91+8 [±2 mm]
External dimensions of front panel:	W ₁ =436, H ₁ =403 [±2 mm]
Fitting battery:	17Ah/12V Sealed Lead Acid (SLA)
Weight net/gross:	4,008 / 4,310 [kg]
PSU:	LRS-75-15
Power supply:	230 V AC (-15%/+10%), 50Hz, 0,85A (max.)
Power supply output:	U=14,4 V DC
Operating environment:	II environmental class, -10°C+ 40°C
Material:	sheet steel DC01, thickness: 1,0mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: enclosure opening 0,5 A; 50 V DC max. NC – normally closed contacts Optionally: 1 x microswitch: detachment form wall, 0,5A;50 V DC (required PKAZ066)
Closing:	screwed: screw x 4
Notes:	lock assembly possible MR008 / MR027, distance from wall (mounting surface) - 8mm
Declaration, warranty:	CE, 2 years from production date