


CODE: **AWO351** v1.3/IV  
 NAME: **LCD/B**

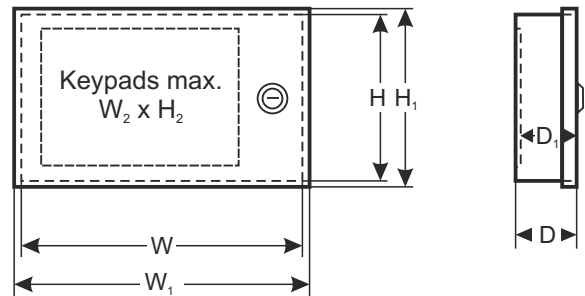

## DESTINATION

### DSC

KEYPADS: RK 5506, RK 5508Z, RK 5532, LCD-600, LCD-4500, LCD-5500, RK 5500Z

### FBII

KEYPADS: XK 206, STOCK 406, 6805, XL 4600 SM, XL 4612 SM, XK7LC, XK708

### SCANTRONIC

KEYPADS: KP600L, EKP1, SIC-1L, KP 2000

### ROKONET

KEYPADS: RP 296 KLC, RP 296 KLS, RP 296 KL8, RP 296 KL16

### PARADOX

KEYPADS: 626, 629, 633, 639

### NAPCO

KEYPADS: RP1054E, RP1016E, RP1000E, GEM-RP2AS, GEM-RP3S, GSM-RP8, GEM-RP1Cae2, GEM-RP2Ase2, GEM3Se2

### SUMMIT

KEYPADS: LED 3106, LCD 3108, PENTA

### SATEL:

KEYPADS: CA-4V KLED, CA-6 KLED, CA 10 KLED, CA-64 S, CA-64 SZ, SZW-02

### CADDX NETWORK

KEYPADS: NX-108E, NX-116E, NX-124E (LED)

### PULSON

KEYPADS: LCD/C, LCD/T

## TECHNICAL DATA

External dimensions of the enclosure: W=235, H=135, D=42 [+/- 2mm]

External dimensions of the front panel: W<sub>1</sub>=242, H<sub>1</sub>=140 [+/- 2mm]

Keyboard mounting dimensions: W<sub>2</sub>=185, H<sub>2</sub>=130, D<sub>1</sub>=32 [+/- 2mm]

Weight net/gross: 0,85kg / 0,95kg [+/-0,1kg]

Operating environment: class II, -10°C+ 40°C

Material description: sheet steel DC01, thickness: 0.7mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Tamper protection: 1 x microswitch: opening, 0.5 A@50 V DC max. NC- contacts

Closing: lockable (various code, two keys included)

Notes: removable back mounting plate

Declaration, warranty: RoHS, 2 year from the production date