
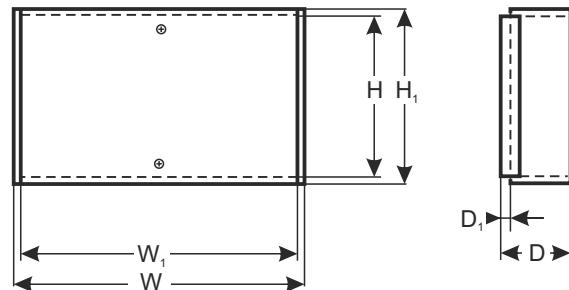


CODE: **AWO454** v1.2/IV
 NAME: **EXPANDER2/SP/GRADE 3**

EN

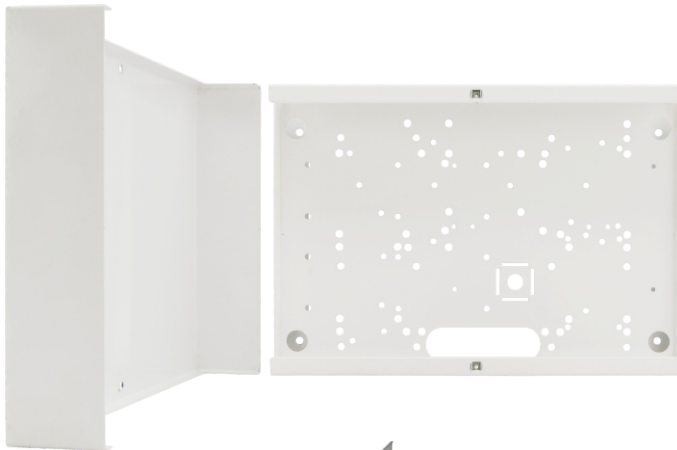

DESTINATION

DSC:

Power Series Neo

Modules: HSM2300, HSM2204, HSM2208, HSM2108, PCL-422

Power Series

Modules: PC5320, PC5100, PC5108, PC4216, PC5200, PC5204, PC5400, IT-100.

Power Series Pro

Modules: HSM3408, HSM2108, AMX-400.

PARADOX:

Modules: ZX4, ZX8, ZX8SP, PGM4, HUB2, PRT3.

RISCO:

Modules: RP432EZ8 LightSYS ProSYS Plus, RP512EZ16 ProSYS Plus

SATEL:

Modules: CA-64 PTSA, CA-10 E, ETHM-1 Plus, INT-ADR, INT-AV, INT-E, INT-FI, INT-GSM, INT-KNX-2, INT-O, INT-PP, INT-R, INT-RS Plus, INT-VG, INT-VMG, MST-1.

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement

TECHNICAL DATA

External dimensions of enclosure:	W=299, H=203, D=65, D ₁ =16 [±2 mm]
External dimensions of front panel:	W ₁ =292, H ₁ =207 [±2 mm]
Net/gross weight:	1,61 / 1,70 [kg]
Operating conditions:	II environmental class, -10°C + +40°C
Material:	sheet steel DC01, thickness: 1mm, anticorrosion protection, color: RAL 9003
Destination:	inside
Tamper switch protection:	1 x microswitch: opening of enclosure 0,5 A@50 V DC max. NC – normally closed contacts
Closing:	screwed: screw x 2
Notes:	distance from wall (mounting surface) – 16mm
Declaration, warranty:	CE, CLC/TS 50131-1 Grade 3, 2 years from production date