



CODE: **AWO514** v.1.1/III EN  
 NAME: **Enclosure for BOSCH Access Control System big**

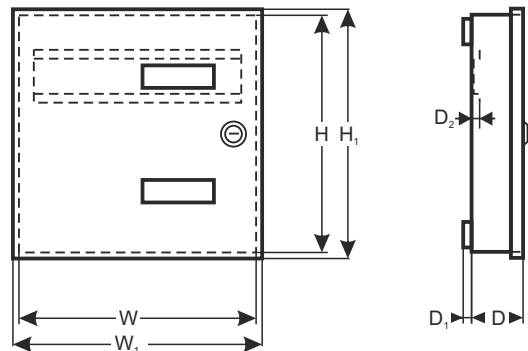

#### Set of cables included

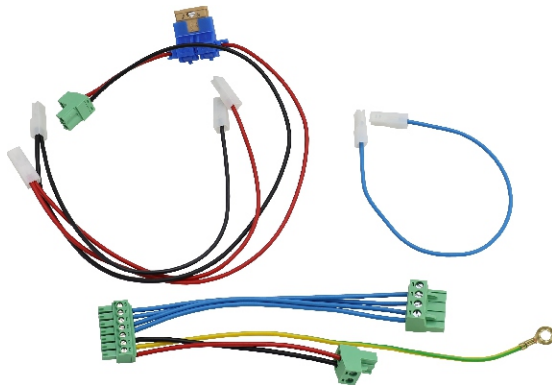

#### DESTINATION

**AW0514** enclosure is designed for mounting (depending on configuration):

- AMC (Access Modular Controller) of access control system on a TH/TS35 (35mm) DIN rail
- Power supply of PCB on a TH/TS35 (35mm) DIN rail
- Additional modules or other devices adapted for mounting on a TH/TS35 (35mm) DIN rail
- battery 2x 7Ah/12V

#### PRODUCT DESCRIPTION

Enclosure is fitted with a bottom mounted 2 DIN rails with a length of 380mm at mounting distances with a height of 18mm, allowing cable routing under enclosure.

Enclosure has a battery compartment for two 7Ah/12V batteries. Set includes a tamper switch (indicating unwanted removal of enclosure from wall). In standard option, enclosure is fitted with a key lock with same code – MR027.

A preview pane of AMC status, protected with polycarbonate glass, is located at front panel. 14mm distance from wall at the bottom makes it easier to connect wires to the devices mounted in enclosure. Enclosure is fitted with plugs and cables required for assembling process.

## TECHNICAL PARAMETERS

<b>External dimensions of enclosure:</b>	W=406, H=518, D+D <sub>1</sub> =89+14 [+/- 2mm]
<b>External dimensions of front panel:</b>	W <sub>1</sub> =412, H <sub>1</sub> =523 [+/- 2mm]
<b>Number of DIN rails / length / number of „S” fields:</b>	2 / 380 / 21
<b>Distance of TH35 DIN rail from rear wall:</b>	D <sub>2</sub> =18mm
<b>Battery space:</b>	2 x 7Ah/12V Sealed Lead Acid (SLA)
<b>Net/gross weight:</b>	6,42 / 7,02 [kg]
<b>Transformer:</b>	without enclosure
<b>Power supply:</b>	without enclosure, can be mounted in power supply PBC BOSCHx2 series
<b>Material:</b>	electrolytic galvanized sheet DC01, 3µm zinc enclosure corrosion protection: polyester paint, industrial use, color 7035 (grey)
<b>Destination:</b>	inside, surface-mounted
<b>Tamper protection:</b>	1 x microswitch: enclosure opening 0,5 A; 50 V DC max. NC – normally closed contacts 1 x microswitch: detachment form wall, 0,5A;50 V DC
<b>Closing:</b>	lock with same code MR027
<b>Notes:</b>	- distance from wall 14mm - embossed sidewalls, for grommets - 2xDIN rails, 380mm long with a distance of 18mm - removable door
<b>Possibility to mount additional equipment:</b>	- a preview pane of AMC KD BOSCHx2 status
<b>Warranty :</b>	2 years from production date