


VFI 6k-10k RTG

- Unity Power Factor 1.0 (kVA = kW)
- Multiple Accessoires are available
- Wide input voltage range for all environments
- Parallel Operation, up to 3 units
- Rack or Tower (includes a Tower Holder)

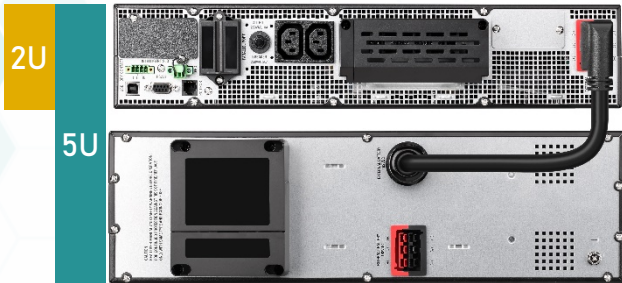


The PowerWalker VFI 6k-10k RTG/ RTGE is a professional Online UPS series featuring unity Power Factor (PF=1.0). Thanks to the double converter technology, the UPS offers the best protection for sensitive systems, and it is the matching solution for mission critical loads and demanding IT environments

The UPS is available in 2 different variations:

RTG: Complete solution including battery pack and MBS/PDU

RTGE: Only the UPS engine without battery pack and MBS/PDU

Complete Solution: Incl. BP and MBS/PDU

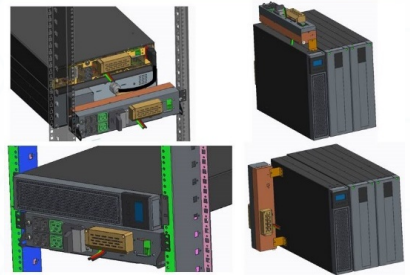

General Features	RTG	RTGE	RTG	RTGE
Power Capacity	6000VA/ 6000W		10000VA/ 10000W	
Output Power Factor	1.0			
LINE Mode Full Load	95.0%			
Parallel Work (Units)	Up to 3 of the same size			
Charger	0-4A [1.4A]		0-4A [2A]	
Input Specifications	Values			
Input Voltage Range	160-276 VAC at 100% Load 110-160 VAC at 50% Load			
Frequency (Synchronized Range)	45Hz - 55Hz at 50Hz 54Hz - 66Hz at 60Hz			
Input Type	Terminal			
Output Specifications	Values			
Nominal Output Voltage	208/220/230/240 VAC			
Voltage Regulation	+/- 1%			
Frequency (Battery Mode)	+/- 1Hz			
Outlets	IEC C13 (2) + Terminal			
Battery Specifications	Values			
Batteries	16 x 12V/ 7Ah	Ext. Battery	16 x 12V/ 9Ah	Ext. Battery
DC Voltage	16 x 12V			
Recharge Time	3h to 90%	-	3h to 90%	-
Full Load Backup Time	4 min	-	2 min	-
Half Load Backup Time	11 min	-	8 min	-
Transfer Time [AC to Battery]	0			
Transfer Time [Inverter to Bypass]	0			